




ASSEMBLY INSTRUCTIONS

ITEM NO.: 7-9215-4-32

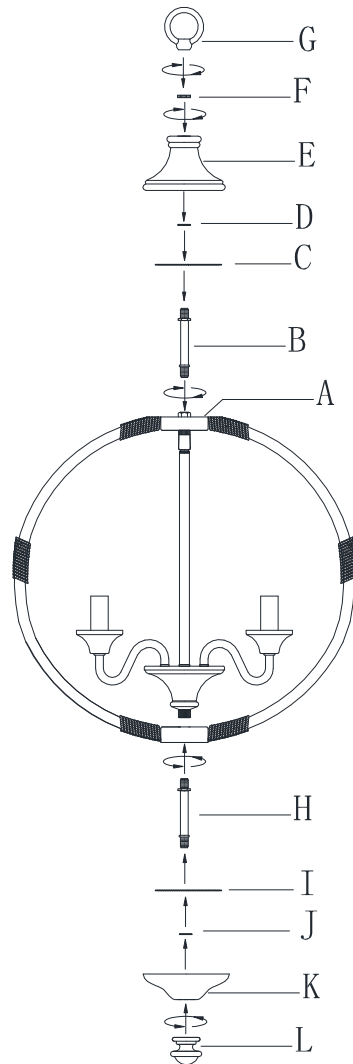

B → A → C → D → E → F → G → H → I → J → K → L

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Install the nipple (B) into the top hole of the fixture body (A).
4. Place flat washer (C), lock washer (D) and cap (E) through the nipple (B), securing with nut (F). Install the loop (G) into the nut(F).
5. Referring to the installation instruction with the product for the wiring and installation.
6. Install nipple (H) into the bottom hole of the fixture body (A).
7. Place flat washer (I), lock washer (J) and cap (K) through the nipple (H), securing with finial (L).
8. Install proper bulbs (not provided) to the sockets referring to the marking and/or labels on the fixture for maximum wattage.
9. Restore the power to the installation point ON.
10. Assembly is completely. Retain this sheet for future reference.